



Specifications

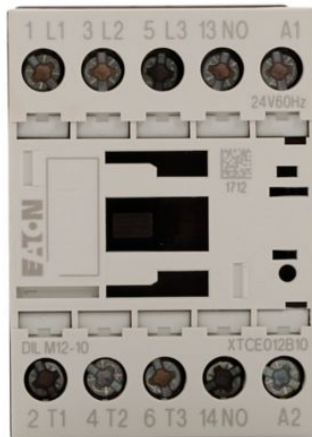

Eaton DILM12-10(600V60HZ)

Eaton XT IEC mini contactor, 12A, 600 Vac, 60 Hz, 1NO, 12A, Frame B, 45 mm, 60 Hz, 1, 2/ 3, 3, 10, 10 (1/3PH @120, 240/208, 240, 480, 600 V), Three-pole, Screw terminals, FVNR, 5.5 kW

Photo is representative



General specifications

PRODUCT NAME	Eaton XT IEC mini contactor
CATALOG NUMBER	DILM12-10(600V60HZ)
EAN	4015082768256
PRODUCT LENGTH/DEPTH	1.8 in
PRODUCT HEIGHT	2.7 in
PRODUCT WIDTH	3 in
PRODUCT WEIGHT	0.48 lb
WARRANTY	1 year
COMPLIANCES	CE Marked RoHS Compliant
CERTIFICATIONS	EN 60947 IEC 60947 CSA Certified UL Listed
CATALOG NOTES	Screw terminals (6-65A); 5 mm (80-150A); no lugs (185-2000A)
PRODUCT TYPE	Mini contactors

Product specifications

AMPERAGE RATING	12A
HP RATING - MAX	1, 2/ 3, 3, 10, 10 (1/3PH @120,240/208,240,480,600 V)
NUMBER OF POLES	Three-pole
TYPE	Full voltage non-reversing miniature contactor
FREQUENCY RATING	60 Hz
FRAME SIZE	45 mm
TERMINALS	Screw terminals
COIL	600 Vac, 60 Hz
COIL VOLTAGE	600 Vac, 60 Hz
CONTACT CONFIGURATION	1 NO
CONTINUOUS AMPERE RATING	12 A
SERIES	XT IEC
OPERATION	Non-reversing
POWER CONSUMPTION	5.5 kW

Resources

	Contactors Explained
MULTIMEDIA	S1. E4. Ask the Experts - NEMA, IEC and DP contactors
SPECIFICATIONS AND DATASHEETS	Eaton Specification Sheet - DILM12-10(600V60HZ)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

