


TECHNICAL DATA

# Fluke PM8907 Line Voltage Adapter/Battery Charger

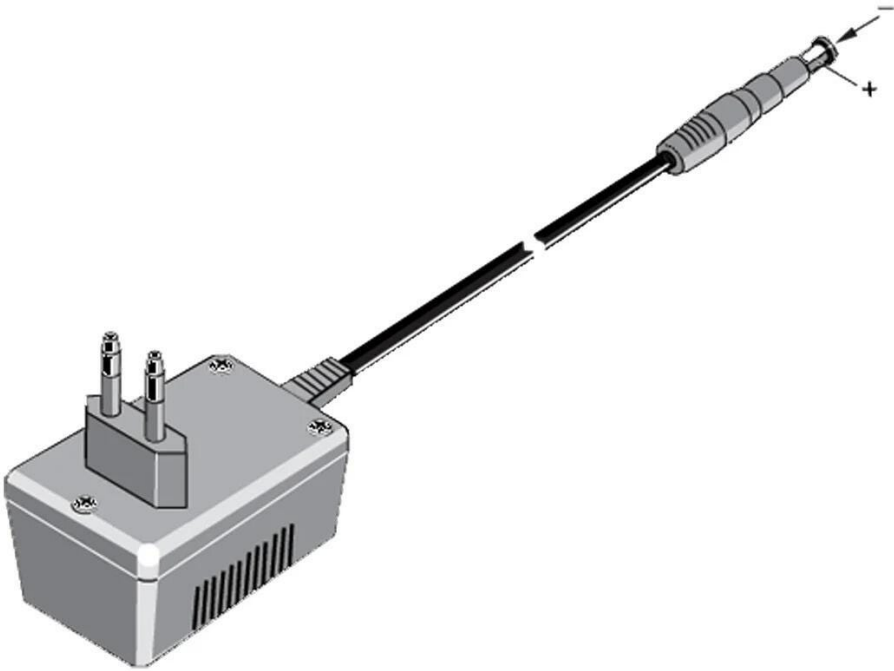

## Key features

808 is equipped with a male receptacle plug that must be connected to a line cord appropriate for local use. (Line cord not included) A North American line plug adapter is included.

## Product overview: Fluke PM8907 Line Voltage Adapter/Battery Charger


Provides power cord operation and charging for ScopeMeter 90 and 120 series as well as for the Fluke 43 and 43B Power Quality Analyzer and some accessories.

## Specifications: Fluke PM8907 Line Voltage Adapter/Battery Charger

| Specifications |                                  |
|----------------|----------------------------------|
|                | 801 (Europe) 230 V ± 10%         |
|                | 803 (North America) 120 V ± 100% |
|                | 804 (United Kingdom) 240 V ± 10% |

|                          |                                   |
|--------------------------|-----------------------------------|
| Frequency (all versions) | 50 to 60 Hz $\pm$ 10%             |
| Output Voltage           | 15 V                              |
| Output Current           | 300 mA max                        |
| Output Plug              | 5 mm power jack per DIN 45323     |
| Power Consumption        | 10 V A                            |
| Max. Voltage to Ground   | 600 Vrms CAT III per IEC 61010-31 |

## Ordering information

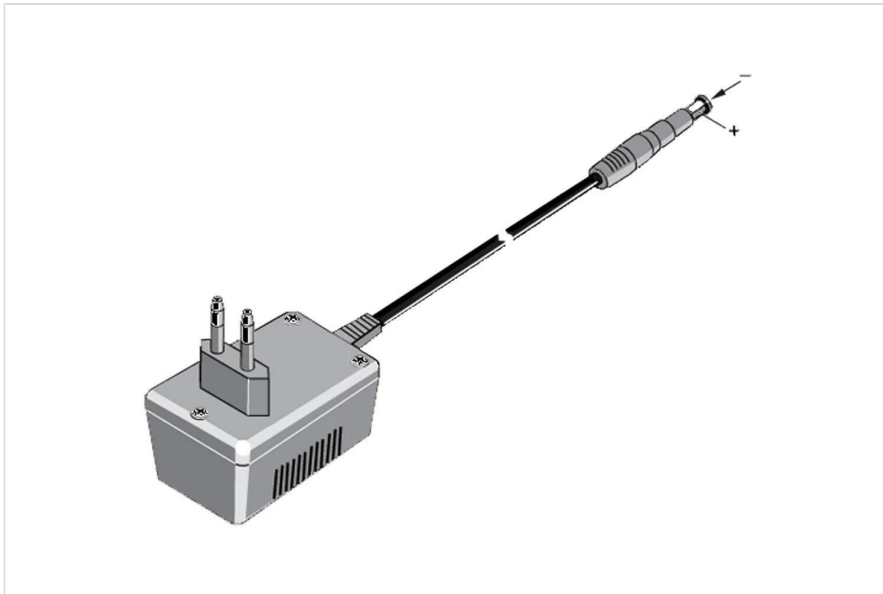**PM8907/830**

Part#: 4328690

UPC#: 095969667692

- Replacement Power Adapter Universal L6

**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**  
PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**  
In the U.S.A. (800) 443-5853  
In Canada (800) 36-FLUKE  
From other countries +1 (425) 446-5500  
[www.fluke.com](http://www.fluke.com)

©2026 Fluke Corporation.  
Specifications subject to change without notice.  
08/2026

**Modification of this document is not permitted  
without written permission from Fluke  
Corporation.**