


Thông số kỹ thuật


Fluke 3000A/6000A 36-Inch Flexi Probe™ 4 Phase

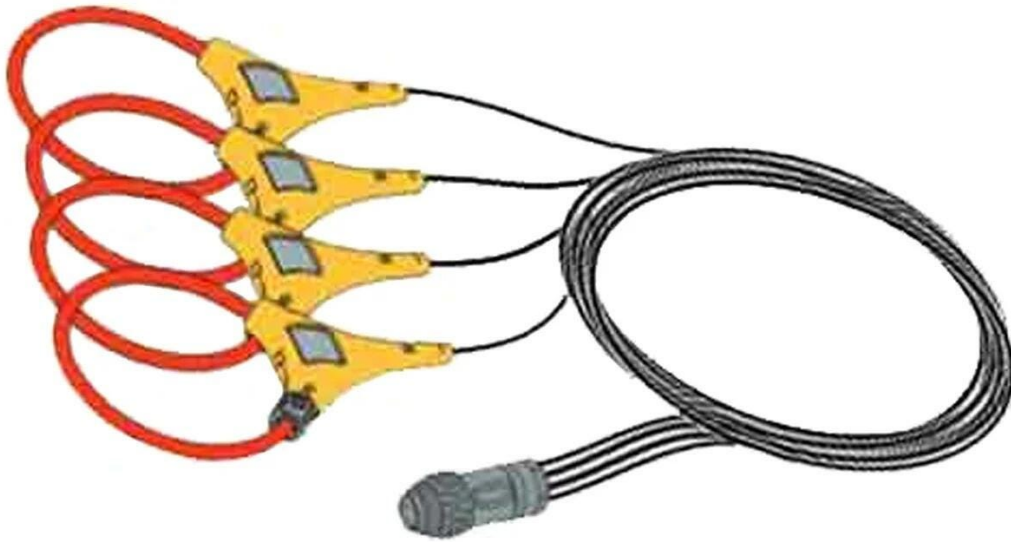

Tổng quan sản phẩm: Fluke 3000A/6000A 36-Inch Flexi Probe™ 4 Phase

The 3000/6000A-TF-4 Thin Flex AC Current Probe sets (the Probe or Product) have been designed for applications with Fluke 1735 and Fluke 1740 series products for accurate non-intrusive measurement of ac currents. Using the latest technologies (integrated memory for calibration data) provides current ranges from 0.8 A up to 6000 A in a frequency range of 40 Hz to 5 kHz.

Model

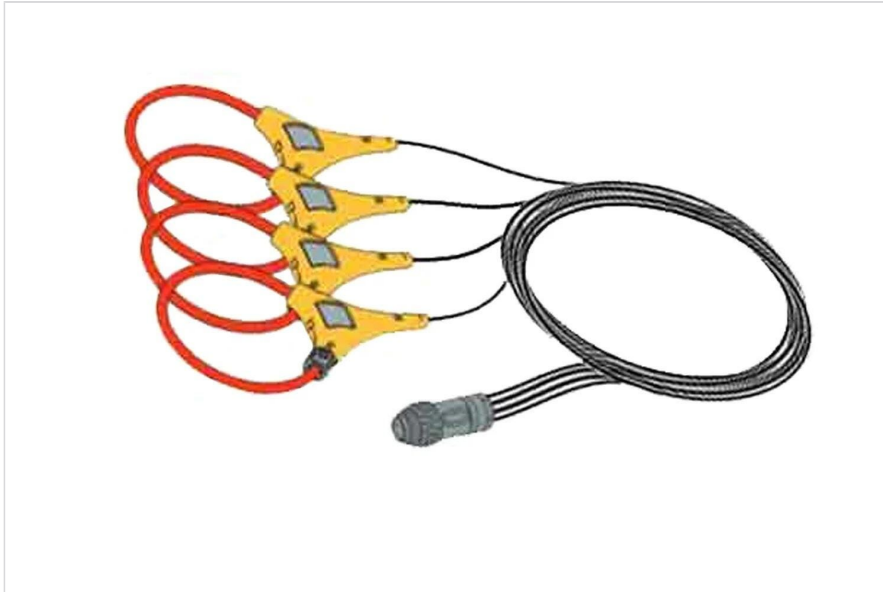

Fluke 3000A/6000A

36-Inch Flexi Probe 4 Phase

Fluke. *Giữ cho thế giới của bạn. không ngừng vận động.*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Europe/M-East/Africa
+31 (0)40 267 5100
In Canada (905) 890-7600
From other countries +1 (425) 446-5500

Representative office of Fluke South East Asia Pte Ltd

C/O Danaher Vietnam
Green Power Tower, 11th Floor Unit 2
35 Ton Duch Thang Street, District 1
Ho Chi Minh City
Vietnam
Tel: +84-8-2220-5371 (ext 103)
Email: info.asean@fluke.com
www.fluke.com/vn

©2026 Fluke Corporation. Specifications subject to change without notice.
08/2026

Modification of this document is not permitted without written permission from Fluke Corporation.